



These industrial style sockets offer front-connected wiring on one level with screw terminals accessible and numbered for ease in installation, wiring and checkout. Sockets are polarized. The mating relay has a locking clip that snaps into the socket, eliminating any need for external holding devices.



LISTED 225G  
IND. CONT. EQ.

UL Listed when used with  
Series 219 Relays

### GENERAL SPECIFICATIONS (@ 25° C)

#### Construction:

Protection category (finger safe)	IP20 IEC (D Series)
Internal metal tracks	Copper alloy, zinc plated
Screws terminals	Steel, zinc plated
Screw style and size	Combination Head - M3.5 X 0.06 x 6.35MM
Screw terminals torque maximum	9 lb-in, 1.01 Nm

#### Electrical Rating

Nominal voltage rating	600V
Nominal current rating	10 Amp

#### Temperature:

Operating	-40°C to 80°C
-----------	---------------

#### Dielectric Strength:

Output to adjacent output terminals	2000V rms
Output to input terminals	2000V rms
Terminals to rail chassis	2000V rms

#### Miscellaneous:

Chassis mount screw torque	8- 10lb, .90 Nm
Flammability rating	94V-0
Wire size	20 -12 AWG, 0.5 - 3mm
Body color	Light grey
DIN locking clip color	Red



27390D



33377D



27390




33377

# Accessories & Sockets

## Industrial 12 & 14 Pin Socket

**Outline Dimensions**  
Dimensions Shown in inches & (millimeters)

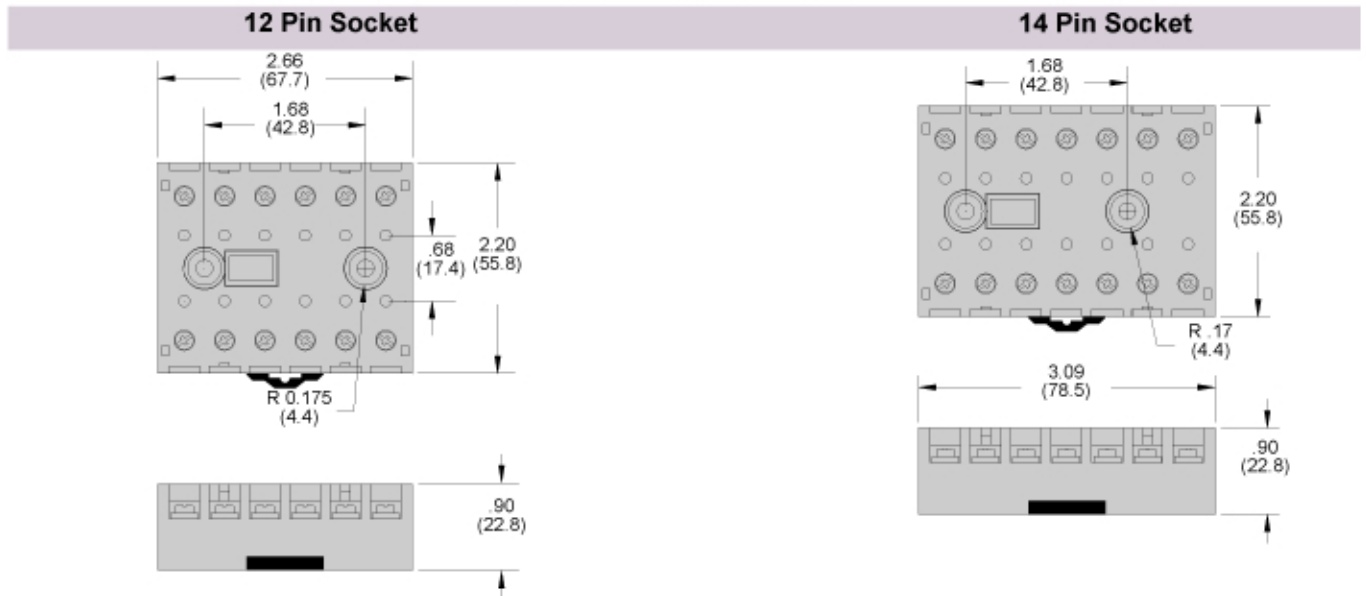

**27390 & 33377 Socket Part Number Chart**

Part Numbers	Style	Weight (Grams)
27390	12 Pin panel mount socket with removable screws	102
33377	14 Pin socket	120

**27390D & 33377D Socket Part Number Chart**

Part Numbers	Style	Weight (Grams)
27390D	12 Pin socket DIN / panel mount, with fingersafe non-removable screw terminals and clamping plates	102
33377D	14 Pin socket DIN / panel mount, with fingersafe non-removable screw terminals and clamping plates	129