




70-178-1

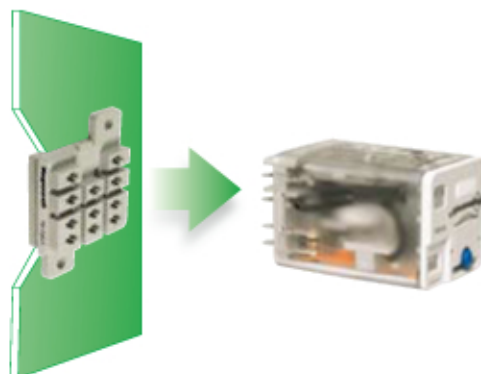

70-178-2

Printed Circuit
Board Mounting

BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED**Standard Part Number****Description****70-178-1**

11-Pin, Printed Circuit Terminals with Mounting Tabs

70-178-2

11-Pin, Printed Circuit Terminals without Mounting Tabs

**General Specifications (UL 508)**

Characteristics	Units	Value
Number of Terminals		11
Electrical Rating		
Nominal Voltage Rating	Volts	300
Nominal Current Rating	Amps	15
Dielectric Strength		
Output to Input Terminals	V rms	2500
Output to Adjacent Output Terminals	V rms	2500
Temperature		
Operating Range:	°C	- 40 to + 80
Storage Range:	°C	- 40 to + 105
Construction		
Internal Metal Tracks		Copper Alloy, Nickel Plated
Terminals		Copper Alloy, Nickel Plated
Miscellaneous		
Socket Mounting:		Printed Circuit
Wire Size Capacity (Maximum)	EN 60204-1	AWG mm ²
Sold Cu (Output)	AWG, mm ²	16 1.0
Stranded Cu (Output)	AWG, mm ²	16 1.0
Wire Connection Method		Solder
Flamability Rating	Class	94V-0
Body Color		Light Gray
Product Certification		UL, CSA
Conformance		CE, RoHS
Weight	grams	12.1

