

## The Complete System Solution!



### I.D. Tag/Write-On Plastic Label

Used for Custom Identification of Circuits.

### Isolated Input and Output Terminals

Separates Control Circuits from Load Circuits.

### Slim Design

Minimizes Space on DIN Rail.

### Mating Hold-Down Clips Available

Secures Relay to Socket.



### DIN Rail End Clip

Locking Screw Keeps a Snug DIN Rail System by Eliminating Sliding Sockets.

### DIN Rail

35 mm Extruded Aluminum Rail. Designed to Work With Most Sockets. Pre-punched for Quick Installation.




- Offers a "one stop solution" for your power management system.
- Variety of contact configurations and materials to meet your switching needs.
- Plug-In switching capabilities from 10mA to 20 Amps.
- A variety of Feature Codes and operation combinations available for all budgets.
- Ejector clips, ribbed relay housings and space-saving sockets allow for easy removal from crowded DIN rails.
- Color and appearance designed for high visibility in all environments.
- Wiring diagrams include NEMA and IEC standards.
- Engineering availability allows for customized relay solutions.
- Internal Coil Bus Jumper System reduces the number of wires required for hook-up to adjacent sockets.

The 700 series sockets have the perfect mix of historical Schneider Electric/Legacy Electric socket quality combined with a dynamic arsenal of options. When mated with the Schneider Electric/Legacy Electric relays and accessories, these RoHS compliant modular system that will meet all your plug-in relay requirements in a package that is both visually appealing and functionally outstanding resulting in Complete Solution.



### Modules

Allows for Optional Protection or LED Modules to be Used With Sockets.

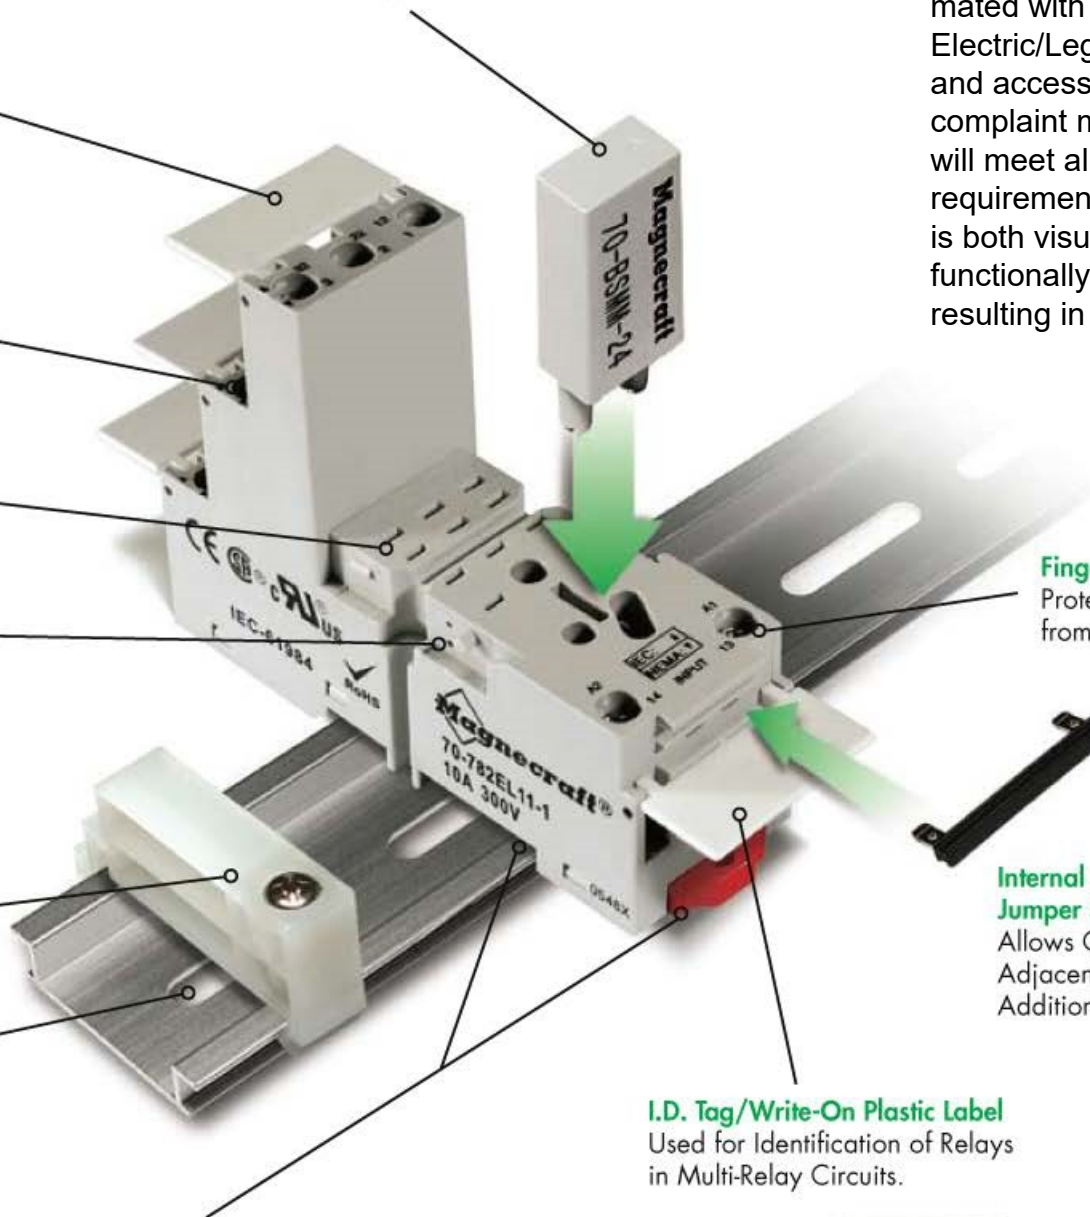

### Finger-Safe

Protects Operators from Live Circuits.

### Internal Coil Bus Jumper System

Allows Connection to Adjacent Sockets Without Additional Wiring.

### I.D. Tag/Write-On Plastic Label


Used for Identification of Relays in Multi-Relay Circuits.

### 2-Way Side or DIN Rail Mounting System

Retrofits Existing Panel Mounting and 35 mm DIN Rail.



The 70-783D11-1 Socket Replaces Our Original 70-783D-1 Socket and is Now Dual Marked With Both Part Numbers.

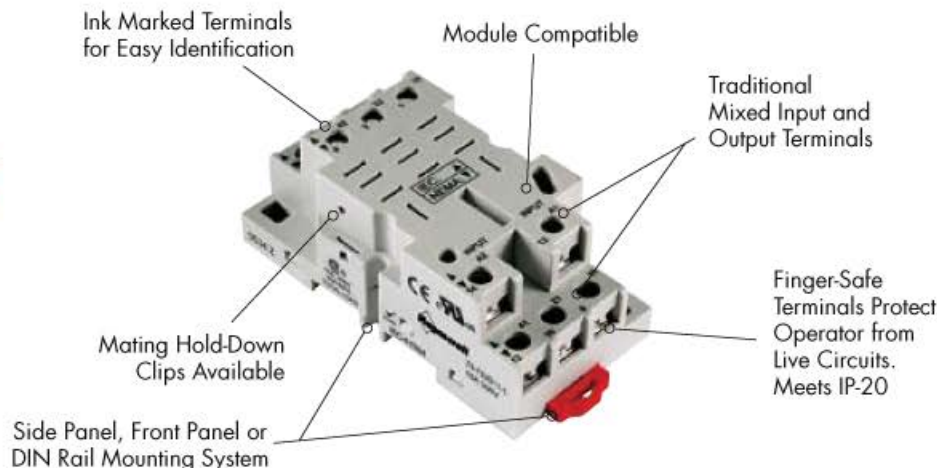

# BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED

## Standard Part Number

## Description

**70-783D11-1**  
Supersedes: 70-783D-1

11-Pin Socket, Finger-Safe, DIN/Panel Mount with Screw Terminals & Clamping Plates.

## General Specifications (UL 508)

Characteristics	Units	Value
Number of Terminals		11
<b>Electrical Rating</b>		
Nominal Voltage Rating	Volts	300
Nominal Current Rating	Amps	16
<b>Dielectric Strength</b>		
Output to Adjacent Output Terminals	V rms	2500
Output to Input Terminals	V rms	2500
Terminals to Rail / Chassis	V rms	2500
<b>Temperature</b>		
Operating Range:	°C	- 40 to + 80
Storage Range:	°C	- 40 to + 105
<b>Construction</b>		
Protection Category (Finger-Safe)	EN 60529	IP 20
Internal Metal Tracks		Copper Alloy, Zinc Plated
Screw Terminals		Steel, Zinc Plated
Screw Style		Combination Head,
Screw size	mm	M3.5
Screw Torque 3.5 mm (Maximum)	Lb-in / Nm	9 / 1.0
<b>Miscellaneous</b>		
Socket Mounting:		Din / Panel
Wire Size Capacity (Maximum)	EN 60204-1	AWG mm2
Soild Cu	AWG, mm2	12 / 14 (2) 4 / 2.5 (2)
Stranded Cu	AWG, mm2	12 / 14 (2) 4 / 2.5 (2)
Wire Connection Method		Screw Clamping
DIN Rail Mounting	EN 60715	35mm
Chassis Mount Screw Torque	Lb-in / Nm	7 / 0.8
Flamability Rating	Class	94V-0
Body Color		Light Gray
DIN Locking Method		Red Plastic Locking Clip
Product Certification		UL, CSA
Conformance		CE, RoHS
Weight	grams	55



## Optional Mating Accessories



783 Relay



16-783SC



16-783IDC



70-ASM



16-700DIN



16-DCLIP-1

Standard Part Number	Description	Catalog Location
783	Relay	Section 1 p.20-21
16-783SC	Metal Hold-Down Clip	Section 3 p.8-11
16-783IDC	Plastic I.D. Clip	Section 3 p.8-11
70-ASM	Module	Section 3 p.4-5
16-700DIN	Metal DIN Rail	Section 3 p.19
16-DCLIP-1	DIN Rail Locking Clip	Section 3 p.19

